


HOACO Rotary Die Cutting Machine

5-Stations Model

The Machine (For illustration only, actual machine may differ)

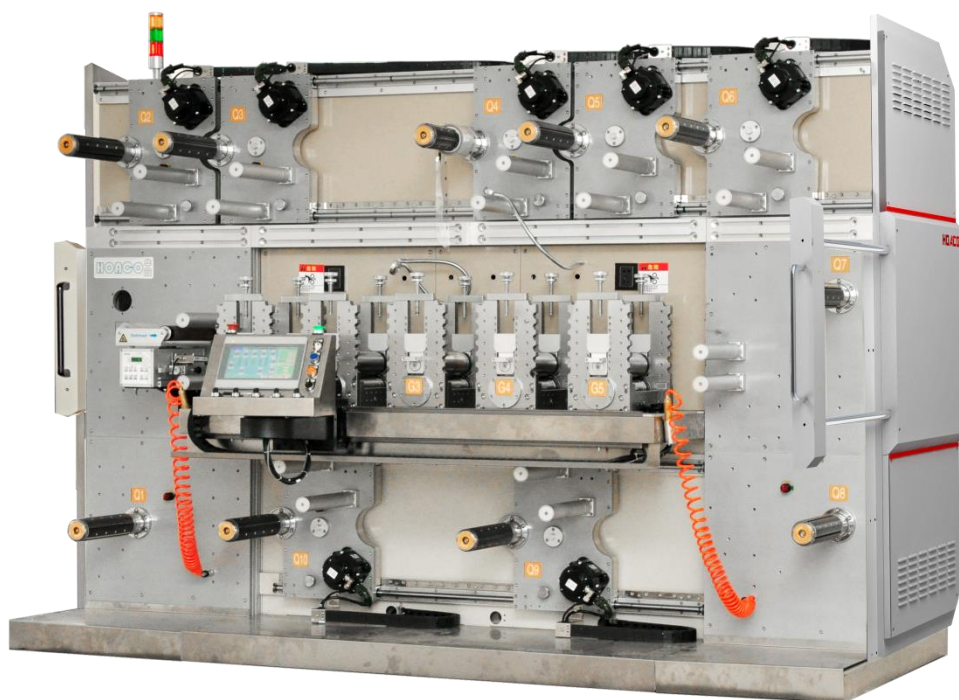

Technical Specifications

Parameters	Specifications
Rated Power	15KW
Maximum Current	30A
Input Voltage	380V \pm 10%, 3 Phase 5 Wires, 50/60Hz
Compressed Air	0.45 – 0.60 MPa
Dimension	L2980 x W1910 x H2270mm
Weight	3 Tons
Typical precision	\pm 0.1mm
Max operating speed	60 meters/min


Web width	250mm or 350mm
Max Web Roll Diameter	500mm
Max Rotary Die Diameter	250mm
Air Shaft Tension (min – max)	1N-150N
Machine Base Frame	Welded Steel
Machine Body Frame	Industrial-Grade T-Slot Aluminium
RDC Station Plates	Stainless Steel
Air Shaft Motor/Controller	Delta Electronics (Taiwan)
RDC Station Motor/Controller	Omron (Japan)
PLC Controller	Omron (Japan)
HMI Screen	Weiview (Taiwan)
Web Guiding System	TechMach (China)
Bottom Roller	Teeth: 81, Module: 1.010634
Anvil Roller	Teeth: 70, Module: 1.010634
Groove Roller	Teeth: 70, Module: 1.010634
Guiding Roller	Teeth: 81, Module: 1.010634
Low Voltage Electrical Components	Schneider (France)
Electrical Cables	China
Magnetic Valve	Taiwan/Japan
Operating environment	Indoor with altitude < 1000m
Temperature	0~+40 °C
Humidity	0-70%RH
Vibration	< 5.9m/S ²

Packing List (Standard 5-Stations RDC Machine)


No.	Part Name	Specifications	QTY	Unit	Remark
1	Station	250	5	group	installed on machine
2	Bottom roller	81 teeth	5	pcs	installed on machine
3	Lamination rubber (hard)	81 teeth	2	pcs	installed on machine
4	Lamination rubber (soft)	81 teeth	3	pcs	installed on machine (1 pc no gear)
5	Guiding groove roller	70 teeth	1	pcs	installed on machine
6	Guiding nip roller	70 teeth	1	pcs	installed on machine
7	Pressing hand wheel	M14X1.5	10	pcs	installed on machine
8	Pressing block	M14X1.5	10	pcs	installed on machine
9	Air expanded shaft	3"-250	10	set	installed on machine
10	Web guiding device	250	1	set	installed on machine (including web guiding bracket)
11	Removable operation platform		1	set	in packaging box
12	Cutter pressing device		3	set	in packaging box
13	Mould adjuster	M16X1.25	3	set	in packaging box
14	Material guiding bent roller	Φ35-40	8	pcs	installed on machine
15		Φ35-55	2	pcs	installed on machine(包胶弯轴)
16		Φ35-55	1	pcs	installed on machine
17		Φ35-75	1	pcs	installed on machine
18	Material guiding straight roller	Φ35	4	pcs	installed on machine
19	Removable material guiding roller		8	pcs	in packaging box
20	T-type guiding rail	40x40x500	2	pcs	installed on machine
21	Material shield plate	Φ200	10	pcs	in packaging box
22		Φ330	16	pcs	in packaging box
23	Check ring	Φ35	8	pcs	in packaging box
24		Φ50	8	pcs	in packaging box
25	Expanded ring		26	pcs	in packaging box
26	Separating cutter	250	2	pcs	installed on machine
27	Reset spring		6	pcs	in packaging box
28	Scissor		1	pcs	in packaging box
29	Utility knife		1	pcs	in packaging box
30	Removable air expanded shaft		1	pcs	in packaging box
31	Expended core	3 to 6	2	pcs	in packaging box
32	Shaft button		2	pcs	in packaging box
33	Pause button		2	pcs	in packaging box
34	Short handle rotary knob		1	pcs	in packaging box
35	Front panel hose lamp		2	pcs	in packaging box
36	Pedal		1	set	in packaging box
37	Air gun	Φ8	2	set	in packaging box
38	Station extended block		2	pcs	in packaging box
39	Damping cushion	Φ100	8	set	in packaging box

40	Air tube joint	HPGΦ10-Φ8	1	pcs	in packaging box
41	T-type nut		20	pcs	in packaging box
42	Oilcan		1	pcs	in packaging box
43	Internal hexagonal wrench		1	set	in packaging box
44	Accessories rack		1	set	in packaging box
45	Standby screw		some	pcs	M6X25、 M8X30、 M10X25

Die Cutting Station

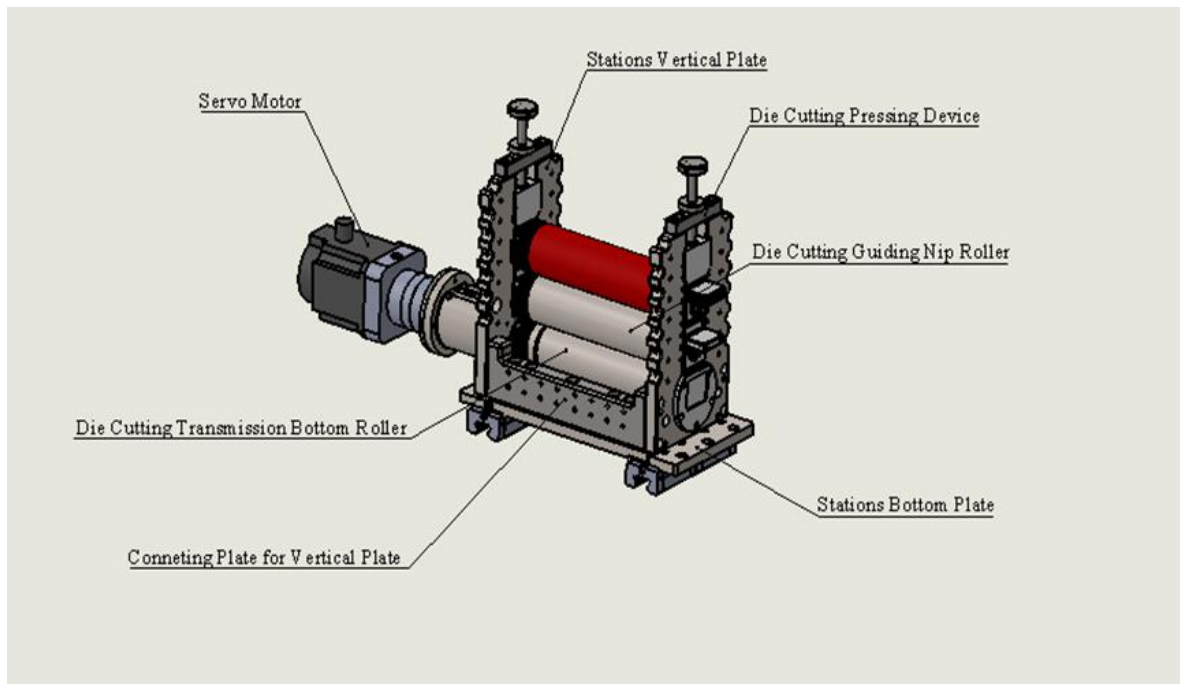

Unwind/Rewind Station

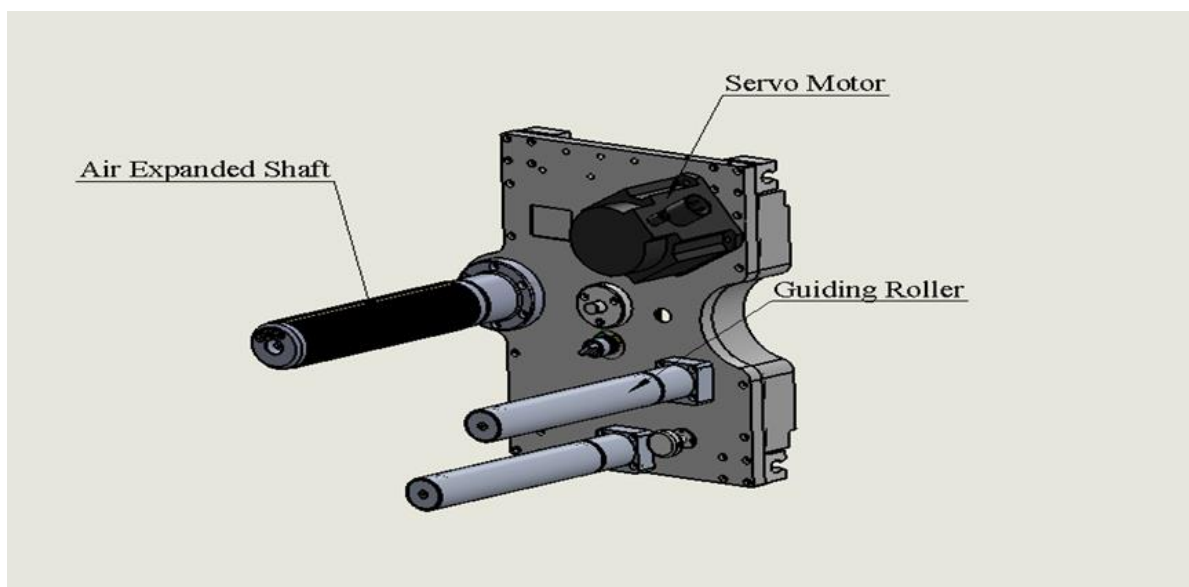

HOACO Machine Features and Benefits

Mechanical

- Available in 3 to 20 movable stations, the machine enables ultimate flexibility in process design and material placement. Each station is fully capable of handling multiple layers of kiss-cut, through cut or lamination
- Materials and cut parts are facilitated in roll form
- Standard web material width: 250mm (10") and 350mm (13")
- Pendant arm HMI touchscreen for greater ergonomics
- Active web guiding control maintains even feeding of materials

Electro-Servo

- All servo-motors are synchronized by our ingenious software
- Dedicated servo-motor for each cutting/laminating and unwind/rewind station ensures synchronized positioning accuracy and precision up to $\pm 0.05\text{mm}$
- CCD camera registration/inspection with feedback for correction/adjustment to improve precision and minimize material waste

Process and Control

- **Dual Systems:** A single RDC machine's available stations can be separately configured to manufacture two different products, operated by two operators at the same time without interference. Modular independent stations and replaceable cutters deliver unparalleled simplicity and flexibility in enabling the manufacturing of two products on a single machine, saving customer investment and factory footprint.
- **Graphite Sheet Cutting:** Overcoming challenges of partial edge banding and backside adhesiveness when cutting thermal graphite sheet, HOACO RDC machine successfully automated multilayered cutting/lamination of thermal graphite sheet with 95% yield. Fueled by the superior performance and yield, HOACO commands a majority market share in the domestic thermal graphite cutting market.
- **Fixed-Length Crosscutting function** can be achieved by setting cutting length in advance according to product requirement. Once set, the machine can automatically crosscut parts based on input material length, eliminating the need for a separate cutting machine.
- **Screen Frame Adhesive Sticker Tape** production through asynchronous cutting and splicing of edge strips greatly reduced material waste while maintaining precision and speed.
- **Single/Double Asynchronous function** enables different modes of cutting operation—automatic async, manual async, coupled async and passive async moded can reduce material waste by up to 30%.